


BRAVE

GET STARTED

POWER ON / OFF

- **Power On:** Long-press the Tail Button
- **Power Off:** Long-press again

OVERVIEW

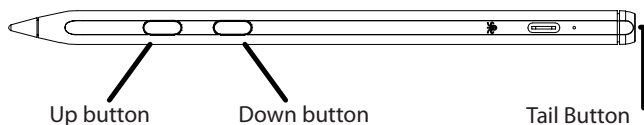

YOUR STYLUS HAS THREE BUTTONS:

Tail Button

Up Button

Down Button

DEFAULT FUNCTIONS

Tail Button (Hold) →

Power On/Off

Up Button (Single Click) →

Eraser

Other Actions →

Customizable via Brave App

BLUETOOTH PAIRING

1. Turn on your stylus.
2. The **blue LED will flash** — pairing mode is active for 3 minutes.
3. Open Bluetooth settings on your device.
4. Select “**Brave Ark Pen**” to pair.
5. Successful pairing → **Blue LED stays solid for 10 sec**, then turns off.
6. If pairing fails → LED turns off automatically.

CHARGING THE BRAVE ARK PEN

- Connect via **USB-C port** at the top.
- **Charging:** Red LED stays on
- **Fully Charged:** Red LED turns off
- Charging time: **~60 minutes**
- Battery capacity: **125 mAh**
- Typical usage: **20+ hours** on a full charge

NOTE: Battery is built-in and not user-replaceable.

LED INDICATORS

Status	LED Behavior
Power Off / Idle	No LED
Charging	Red LED ON
Fully Charged	Red LED OFF
Low Battery (<3.2V)	Red LED Flashing
Bluetooth Pairing	Blue LED Flashing
Pairing Successful	Blue LED Solid (10 sec)
Pairing Failed	LED OFF

USAGE & REPLACEMENT

- The Brave Ark Pen tip is designed for smooth, precise writing.
- If the tip feels worn or inconsistent, replace it by gently pulling it out and inserting a new one.
- Tips are made of high-quality plastic for durability and screen safety.

TECHNICAL SPECIFICATIONS

BATTERY:

Type: 125mAh rechargeable polymer battery

Charging: USB-C, 5V 1A

Charging current: 210mA \pm 20mA

PERFORMANCE:

Pressure Levels: 4096

Tilt Support: Yes

Working Frequency: 100–500 kHz

Working Current: <6mA @ 3.7V

Working Time: >20 hours

SAFETY & CARE

- Operating temperature: **0°C to +40°C**
- Storage temperature: **-5°C to +45°C**
- Do not expose to heat, fire, or liquids..
- Do not disassemble — contains a non-replaceable battery.
- Clean the pen with a soft, dry cloth